




7- ÖN İZOLASYONLU BORU SİSTEMLERİ -----

ÖN İZOLASYONLU DİRSEK 45°-90° PRE-INSULATED ELBOW 45°-90°

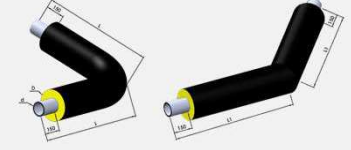

Servis borusu	Kılıf Çapı	Dirsek Yay Uzunluğu	90° için	45° için
Anma çapı/S.D.Ç.	mm	90° için (A-mm)	L Boyu mm	L1 Boyu mm
DN 20/26,9	75	28,5±2,5	350 + A	350
DN 25/33,7	90	38,0±2,5	350 + A	350
DN 32/42,4	110	47,5±2,5	350 + A	350
DN 40/48,3	110	57,0±3,0	350 + A	350
DN 50/60,3	125	76,0±3,0	350 + A	350
DN 65/76,1	140	95,0±3,0	350 + A	350
DN 80/88,9	160	114,5±3,0	350 + A	400
DN 100/114,3	200	152,5±3,0	350 + A	400
DN 125/139,7	225	190,5±4,0	350 + A	500
DN 150/168,3	250	228,5±4,0	350 + A	500
DN 200/219,1	315	305,0±4,0	400 + A	500
DN 250/273,1	400	381,0±5,0	400 + A	600
DN 300/323,9	450	457,0±5,0	500 + A	650
DN 350/355,6	500	533,5±10,0	500 + A	650
DN 400/406,4	560	609,5±10,0	500 + A	700
DN 450/457,2	630	686,0±15,0	600 + A	750
DN 500/508,0	710	762,0±35,0	600 + A	800
DN 600/609,6	800	900,0±50,0	600 + A	900